

24VDC Supply pulsedDC Ionising Air Blower for Ionisation of 3D Parts, Electronics, Operator Work Areas


- pulsedDC Ionisation
- Adjustable double ball bearing long lifetime lightweight fans
- Fan, ionisation fault LEDs
- Flexible mounting thanks to compact design




Technical Information

Product	SE-BLC-F-75-C
Power Supply	24V DC supply via M12 connector, 0.4A, Max 9W
Ionisation Performance	1kV to 100V in less than 7secs distance 1000 mm
Fan Speed Adjustment	Via Pot on the panel
Environment	0-60°C, %70rH max.
Noise Level (Measured at 1000mm)	<60 dBA
Safety	Shockless, pin current <250µA
Standards	2014/30/EU EMC Directive 2014/35/EU Low Voltage Directive


Drawing / Dimensions

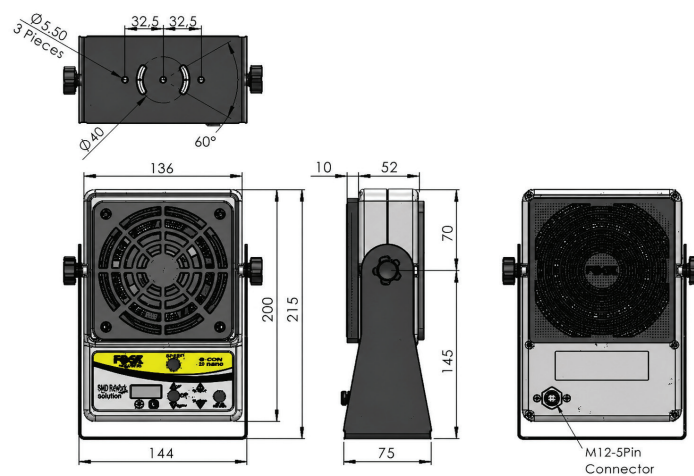


Applications



Electronic Card Assembly Air C.



Electronic Card Assembly TV



Y-L-FÖGE Compact Blower