


VL-BLA Large Area Backlight (300 to 1000mm)

- Robust mechanical design
- Diffuse large area thin design
- 24VDC power supply
- Complete metal case for harsh environments

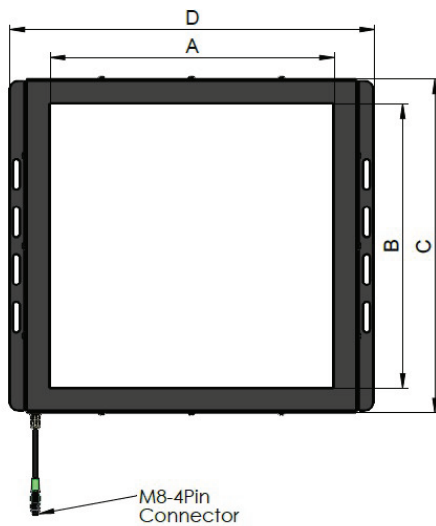

CE

Features



Polycarbonate diffuser with high light transfer



Slim, compact design



How to use



Product Types

Model	Color	Wavelength/ Color Temperature	Power Supply	Power Consumption	IP Rating (Option: IP67)	Connection	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Housing Material	Light Angle (°)
VL-BLA-300-300-W-24-C30	W	6500K	24VDC	24W	IP50	M8 4 pin w 300mm cable	300	300	352	385	21	Steel (Black, Painted)	180°
VL-BLA-400-400-W-24-C30	W	6500K	24VDC	34W	IP50	M8 4 pin w 300mm cable	400	400	452	485	21	Steel (Black, Painted)	180°
VL-BLA-500-500-W-24-C30	W	6500K	24VDC	43W	IP50	M8 4 pin w 300mm cable	500	500	552	585	21	Steel (Black, Painted)	180°
VL-BLA-600-600-W-24-C30	W	6500K	24VDC	50W	IP50	M8 4 pin w 300mm cable	600	600	652	685	21	Steel (Black, Painted)	180°
VL-BLA-700-700-W-24-C30	W	6500K	24VDC	70W	IP50	M8 4 pin w 300mm cable	700	700	752	785	21	Steel (Black, Painted)	180°
VL-BLA-800-800-W-24-C30	W	6500K	24VDC	80W	IP50	M8 4 pin w 300mm cable	800	800	852	885	21	Steel (Black, Painted)	180°
VL-BLA-900-900-W-24-C30	W	6500K	24VDC	90W	IP50	M8 4 pin w 300mm cable	900	900	952	985	21	Steel (Black, Painted)	180°
VL-BLA-1000-1000-W-24-C30	W	6500K	24VDC	100W	IP50	M8 4 pin w 300mm cable	1000	1000	1052	1085	21	Steel (Black, Painted)	180°